

# WORKSafe®

PEOPLE PROTECTION

## CHEMPRO 1500



### Features


- Double layer PPSB improves fabric strength, tear and puncture resistance.
- Melt blown fabric laminated between the PPSB layers provides excellent particle barrier capabilities. The fabric filters resist 99.8% of particles of size 0.5-1  $\mu\text{m}$ .
- Passes EN1073-2 for protection against radioactive particulate contamination.
- Passes EN1149-5 for antistatic property (by option).
- Fully elasticated hood, ankles and wrists, maximize comfort and protection.

### Applications

- Asbestos Handling
- Automotive
- Crisis Management
- Construction
- Decorative Work
- Waste Management




### Seam Construction

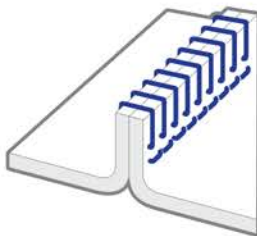

#### Stitched Seam

Reinforced 4-thread overlapped seam offers stronger seam strength and better protection.

### Fabric Construction

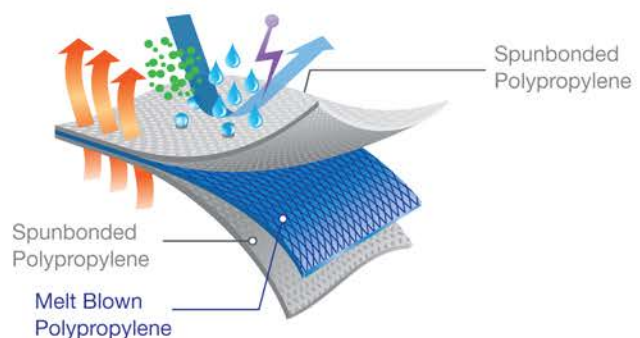

TYPE 5



TYPE 6



EN 1073-2



EN 1149-5

CE 0120

Call us today at +65 6776 6200 or  
email us at [pds@safety.com.sg](mailto:pds@safety.com.sg) for more information

LIKE US ON   
[WORKSafe.com.sg](http://WORKSafe.com.sg)